


ARTECH

AR 1610 & 810

Voice Recording System

Special highlight:

- easy to use
- simple maintenance
- suitable for branch office monitoring
- stand alone (no PC based) with display IP setting
- large capacity with 160 GB HDD removeable (SATA technology)
- multi users
- detail reports and searching
- live monitoring

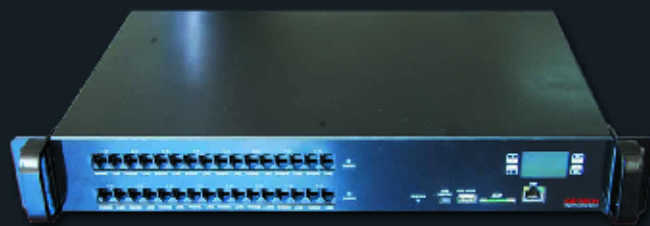


SPECIFICATION:

- capacity : 8 (AR 810) & 16 (AR1610)
- harddisk capacity : 160 GB
- recording capacity : 10,000 hours
- recording startup way : timer, polarity reversal, key controlling, voice
- CID detecting signal : DTMF dan FSK
- CID detecting signal range : 0 dB - 30 dB
- frequency response range : 100 Hz - 3400 Hz
- input impedance : > 5.1 ohm (DC), > 100 k ohm (AC)
- series voice rate : > 70 dB
- signal noise rate : > 70 dB
- input voltage : DC 19 Volt
- input voltage range : DC 18 Volt - DC 24 Volt
- operating voltage : 500 MA
- max start up current : 1.5 A
- fixed power : 10 W
- support battery type : one couple of 12 V / 2C battery in series
- operating temperature : 0 C - 40 C
- operating humidity : 0% - 90%
- line and phone jack : RJ-11
- USB jack : USB 1.1 Host, USB 1.1 Device
- network jack : RJ-45
- accessories : DC 19 volt power adaptor, software, user's manual
- weight : 15 kg
- SIRIM certified : yes

No	Time	Type	Telephone No	Phone Number	Ext	Duration	Caller	City Area	Remarks
1	09:02:40	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
2	09:05:40	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
3	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
4	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
5	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
6	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
7	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
8	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
9	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
10	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
11	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
12	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
13	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
14	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
15	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
16	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
17	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
18	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
19	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432
20	10:10:00	In	0812 54	0170843242	300	0:00	0812 54	01708432	01708432

Detail Reports

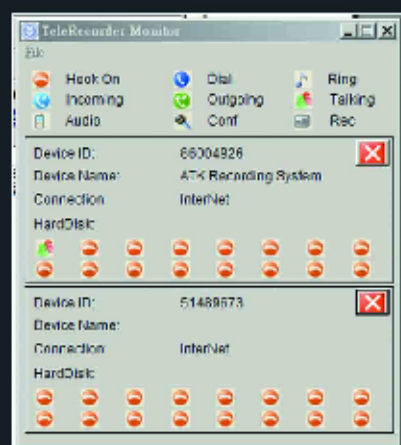

Device Monitor